


Specifications:

Model	Colour code curve	Bore mm	Motor output kW	Rated current A	Head max. m	Capacity max. l/min	Dry weight kg w/o cable	Max. solid handling ø mm	Pressure resistance max. m	Cable length m
GPN622	1	150	22,0	42,5	30,0	5000	415,0	30	30	20

Heavy Duty Sand Pump


A special steel impeller and suction plate have greatly increased the pump's life. The casing is designed to have wide passing area, thorough thickness and anti-abrasion material.

ø Discharge bore mm		150		
Pumping Fluid	Temperature	0-40°C		
	Type of Fluid	Sludge, Slurry, Liquids containing sandy mud and/or bentonite		
Pump	Components	Impeller	Open type impeller	
		Shaft Seal	Double mechanical seal	
		Bearings	Shielded ball bearings	
	Material	Impeller	Chromium iron casting	
		Casing	Grey iron casting EN-GJL-200	
		Suction Plate	Chromium iron casting	
		Shaft Seal	Silicon carbide in oil bath	
Motor	Insulation		Insulation class B	
	Lubrication		Turbine oil (ISO VG32)	
	Type, Poles		Induction motor, 4 poles, IP68	
	Motor Protector (built-in)		Circle thermal cut-out	
	Phase / Voltage		3-phase / 400V / 50Hz / d.o.l.	
	Material	Casing	Grey iron casting EN-GJL-150	
		Shaft	Chromium-molybdenum steel (DIN 1.7220)	
Cable		Rubber, NSSHÖU		
Discharge Connection		Threaded flange/Hose coupling		

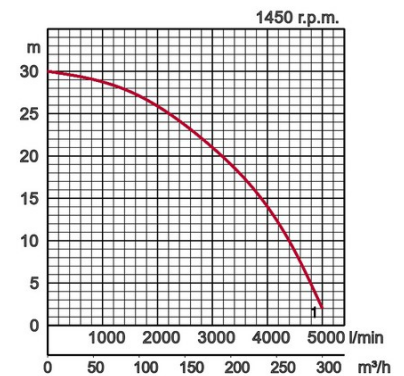

Dimensions in mm:

Model	A	A1	B	B1	D	H	W1
GPN622	725	625	528	335	572	1102	300

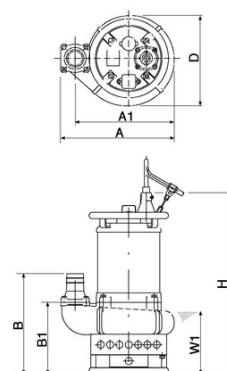

W1: lowest running water level

In the event of abrasive and corrosive utilization, stronger wear and tear will take place naturally in certain components. In this regard, please pay attention to our website www.tsurumi.eu/english/applications.htm.