


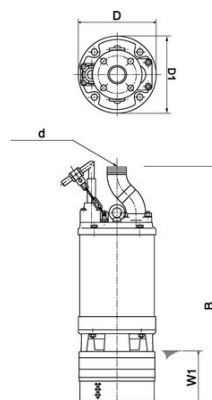
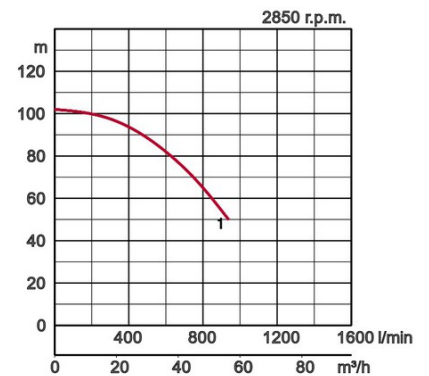
Specifications:

| Model | Colour code curve | Bore mm | Motor output kW | Rated current A | Head max. m | Capacity max. l/min | Dry weight kg w/o cable | Max. solid handling ø mm | Pressure resistance max. m | Cable length m |
|--------|---|---------|-----------------|-----------------|-------------|---------------------|-------------------------|--------------------------|----------------------------|----------------|
| LH322W |  1 | 80 | 22,0 | 39,0 | 102,0 | 940 | 304,0 | 8,5 | 30 | 20 |

High Head Pumps - Slim Design

High water pressure resistance (30m H2O). Top discharge with center flange, efficient cooling by water jacket.

| | | | |
|----------------------|-----------------------------|---|--------------------------------|
| ø Discharge bore mm | | 80 | |
| Pumping Fluid | Type of Fluid | Spring water, Rain water, Ground water, Sand carrying water | |
| | Temperature | 0-40°C | |
| Pump | Components | Impeller | Closed type impeller |
| | | Shaft Seal | Double mechanical seal |
| | | Bearings | Shielded ball bearings |
| | Material | Impeller | Chromium iron casting |
| | | Casing | Grey iron casting EN-GJL-200 |
| Shaft Seal | Silicon carbide in oil bath | | |
| Motor | Motor Protector (built-in) | | Circle thermal cut-out |
| | Lubrication | | Turbine oil (ISO VG32) |
| | Type, Poles | | Induction motor, 2 poles, IP68 |
| | Phase / Voltage | | 3-phase / 400V / 50Hz / d.o.l. |
| | Insulation | | Insulation class B |
| | Material | Casing | Grey iron casting EN-GJL-200 |
| | | Shaft | Stainless steel EN-X30Cr13 |
| Cable | | Rubber, NSSHÖU | |
| Discharge Connection | | JIS 20K Flange | |



Dimensions in mm:

| Model | d | B | D | W1 |
|--------|----|------|-----|-----|
| LH322W | 80 | 1234 | 330 | 300 |

W1: lowest running water level

In the event of abrasive and corrosive utilization, stronger wear and tear will take place naturally in certain components. In this regard, please pay attention to our website www.tsurumi.eu/english/applications.htm.